

Panasonic
ideas for life



DVCPRO P2 SERIES

DVCPRO 50

DVCPRO HD

ING — A REVOLUTION, IT NEWS GATHERING

Get Ready to Go **Beyond**

Get ready to take a leap beyond the conventional, a leap beyond today's limits.
Get ready for Panasonic's DVCPRO P2 Series – broadcast equipment that brings unprecedented mobility, performance and convenience to news gathering.



Panasonic

Official Worldwide
Olympic Partner

The host broadcaster for the Torino Olympic Games has selected Panasonic as its supplier of standard and high definition recording equipment for the 2006 Olympic Winter Games. Panasonic DVCPRO P2 solid-state memory as well as DVCPRO HD and DVCPRO50 recording equipment will be used for the Games.

At the heart of the P2 Series is Panasonic's innovative plug-in PC card type media. Called P2 ("Professional Plug-in"), these solid-state cards are neither tape nor disc and require no moving parts. P2 cards fit neatly in the slots of P2 Series equipment and record DVCPRO HD*/DVCPRO 50/DVCPRO/DV data. The P2 card is extremely rugged, and it assures outstanding anti-vibration and anti-shock performance to the P2 camera-recorder. Most importantly, the P2 card's high data transfer speed, ruggedness and expandability brings an entirely new era of mobility to news gathering.

P2 Series equipment records in MXF – a file format whose exceptional PC versatility is transforming the news production workflow. The P2 provides random access to thumbnail-displayed scenes for instant playback and on-air transmission. The P2 card mounts directly into the PC card slot on a PC, so you have instant access for nonlinear editing and for faster data transferring into the network

The P2 Series is a fusion of the very best in AV and IT worlds, while also offering compatibility with today's studio equipment. It goes way beyond today's generation of equipment. The P2 Series introduces a new era in news acquisition – one in which conventional ENG gives way to a more mobile, reliable and faster IT-based news gathering (ING).

* Possible with the newly developed AG-HVX200 DVCPRO HD P2 handheld Camera-Recorder





The New Workflows of News —

Bringing Greater Reliability to News

Acquisition: The P2 card

The P2 card far surpasses videotape and discs in reliability. It withstands shock up to 1,500 G and vibration up to 15 G, operates in temperatures from -20 to 60°C, and can be stored in temperatures from -40 to 80°C. The P2 lets you work in the harshest news gathering environments in the world. And a card can be rewritten up to 100,000 times, with no degradation and no drop-outs. With the P2 card's rewritability, you don't have to carry as much gear to acquire the news. This means greater mobility in the field, with less equipment and a smaller crew.

News Gathering Solutions: The P2 cam

Because the P2 camera-recorders have no drive mechanism, they provide reliable recording even when subjected to shock and vibration. Mobility is outstanding. The full-size P2 cams have five cards slots and offer seamless, continuous recording over all five. Cards load and unload quickly. A hot-swap function lets you replace cards on the fly. A built-in colour LCD monitor displays thumbnails of recorded clips. The P2 cams also offer proxy data recording, voice memo capability, and shot markers.


Newly Developed; P2 handheld and P2 store

The new AG-HVX200 handheld camera-recorder takes P2 mobility a step further. The first P2 unit to offer DVCPRO HD/SD multi-recording, this handheld is a high-end, affordable solution to everything from news gathering to contents production.

The new AJ-PCS060G P2 Store - a portable disk unit that provides high-speed data copying - simplifies the use of P2 cards, speeds up production, and helps keep costs down.

Immediate Viewing, Data Transfer and Nonlinear Editing

P2 is fast. In data transfer and editing speed, it stands far beyond other media. The P2 card slips into the card slot on a laptop PC*1 and mounts directly — no digitizing required — for immediate viewing or network data transfers. With a P2-compatible mobile nonlinear editor, you can edit recorded clips directly. No uploading (file copying) is necessary. With a USB 2.0 cable, you can connect the P2 cam to a PC and use the cam's five card slots as an external drive. Powerful functions like these deliver you unprecedented speed in the field and greatly reduce production time -- a big

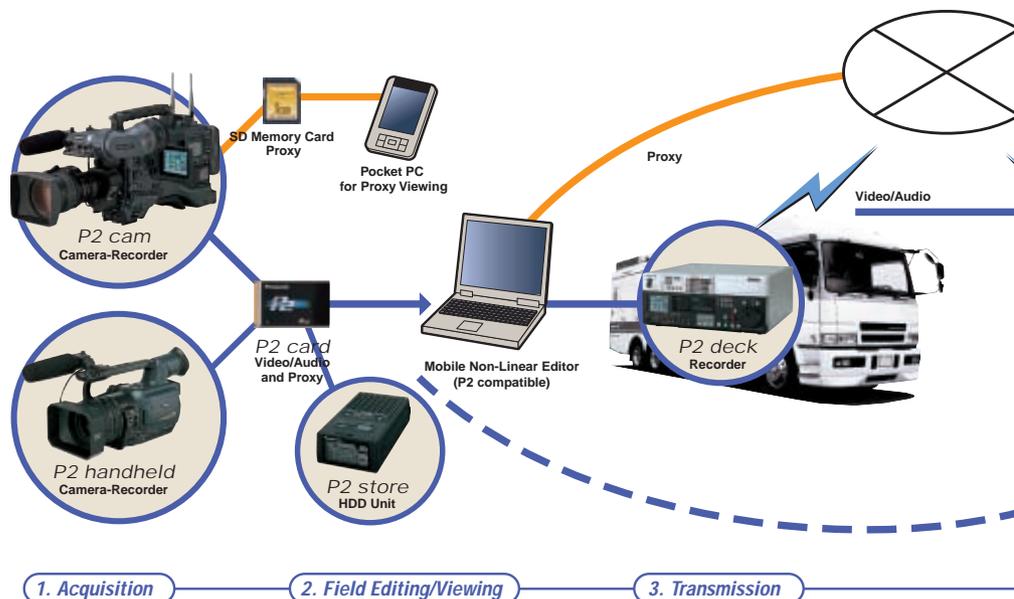

ING: IT-based News Gathering



advantage in this "get the news first and faster" business. Also, being able to use a laptop PC as a monitor, editor, and for data transfer means more mobility and less strain on your budget.

*1: The P2 card driver (bundled with all P2 cams, decks and drives) must be installed. The P2 card driver operates under Windows XP and Windows 2000.

Random Access Playback and Nonlinear Editing: The P2 deck

The P2 Series provides super-fast news transmission from mobile vans. This is thanks in part to the P2 deck, which features five P2 card slots and the same kind of jog & shuttle operation as a VTR. Simply view the thumbnails of the recorded clips on the front-panel Colour LCD Monitor, and use the jog dial to select the ones you want. The clips can be played back instantly for on-air playback.

Its Playlist function lets you play the equivalent of 100 events on a nonlinear editor, for quick post-acquisition program production and transmission. With a USB 2.0 cable, you also can connect the P2 deck to a PC and use the deck as an external drive for a P2-compatible nonlinear editor.

Studio Networking: The P2 drive

The DVCPRO P2 Series stands as a remarkably high-speed solution to studio networks that use nonlinear editors and AV servers. The P2 drive is designed for either built-in or external use on any PC equipped with a USB 2.0 interface. With the P2 drive connected, you can use a desktop PC* to instantly preview the data on a P2 card or transfer it to the server. Or, with a P2-compatible nonlinear editor you can use recorded clips directly as editing clips.


*The P2 card driver (bundled with all P2 cams, decks and drives) must be installed. The P2 card driver operates under Windows XP and Windows 2000.

More Flexibility — Combined VTR Use and Data Archive System

Panasonic's ING concept — IT-based news gathering — is not a closed system. The P2 decks are equipped with the same interfaces as today's DVCPRO VTRs, so they can link seamlessly into conventional systems for tape editing and on-air transmission.

Simply, the P2 Series lets you make full use of existing equipment while moving your facility forward to a true nonlinear editing operation.

Panasonic is also developing data archive system. This will give you several exciting ways to build a powerful, flexible system that delivers the higher performance you need at a cost that fits your budget.

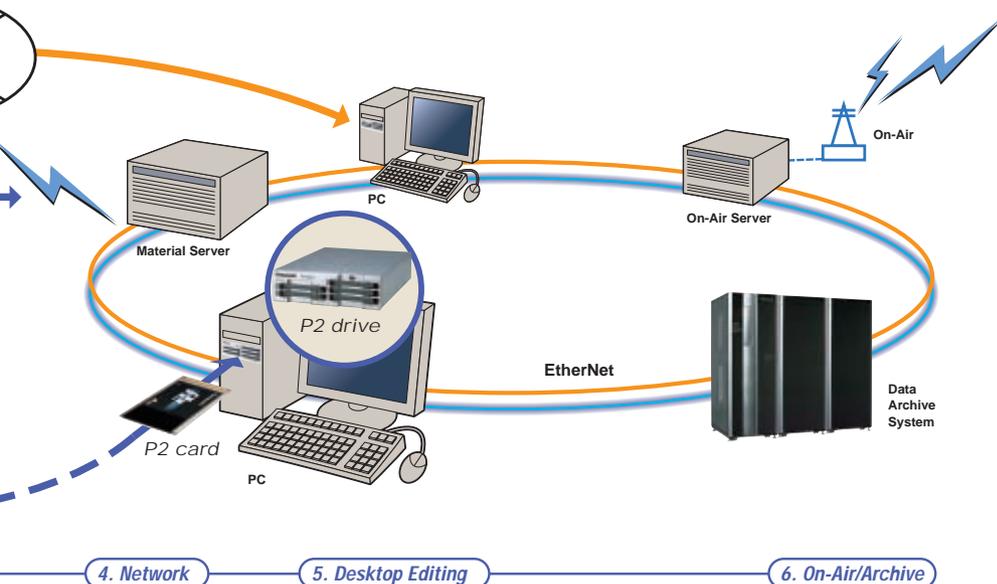

P2 card

P2 card Line-up Expands with New 8GB Capacity



AJ-P2C008H
H-Series 8GB Memory card



AJ-P2C004H
H-Series 4GB Memory card



AJ-P2C002S
S-Series 2GB Memory card



Innovative PC Card Media for Professionals

P2, which stands for Professional Plug-in, is a compact solid-state memory card designed for professional AV use. Compliant with PC Card standards (Type II), the P2 card plugs directly into the card slot of a laptop PC.* AV data on the card mounts instantly, with each cut as MXF and metadata file. The data can be used immediately – no digitizing necessary – for nonlinear editing, or it can be transferred over a network.

*The P2 card driver (bundled with all P2 cams, decks and drives) must be installed. The P2 card driver operates under Windows XP and Windows 2000.

Super-Compact Cards with Large Capacity and High Speed

In developing the P2 card, Panasonic applied some of the same technology that proved so successful in the SD Memory card.*¹ Basically, four SD Memory cards are packaged together to create a single P2 card. This gives the P2 card four times the capacity and four times the transfer speed of a single SD Memory card.

Now the P2 line-up is growing. The new AJ-P2C008HG is an 8GB-capacity card*² that extends DVCPRO or DV recording time to 32 minutes. And this 8GB P2 card supports 8 minutes DVCPRO HD recording.

The P2 far surpasses all other AV media in transfer speed, too. The AJ-P2C004H and AJ-P2C008H transfers data at up to 640 Mbps*³, which can greatly speed up production processes.


P2 card Recording Time Reference

Model Number	Capacity Indication* ²	Approx. Recording Time				Data Transfer Speed* ³ (Max.)
		DVCPRO/DV (Audio 2ch)	DVCPRO50 (Audio 4ch)	DVCPROHD (1080/50i)	DVCPROHD (720/25P)	
AJ-P2C002SG	2 GB	8 min.	4 min.	—	—	320 Mbps
AJ-P2C004HG	4 GB	16 min.	8 min.	4 min.	8 min.	640 Mbps
AJ-P2C008HG	8 GB	32 min.	16 min.	8 min.	16 min.	640 Mbps

*1 SD Memory card has quickly become the world's standard media for compact, portable, high-capacity storage. New SD Memory cards are being developed every year with double the capacity of previous cards; development of a 32-GB card is just a few years away. More than 700 of the world's leading companies now support SD Memory card, assuring significant economies from scale and competition. And as production volumes rise, prices will continue to fall.

*²Total card capacity includes space for data management such as system data, therefore, actual usable area is less than capacity indicated on the card.

*³This data transfer speed is theoretical value. An actual data transfer speed varies according to operating condition and devices.

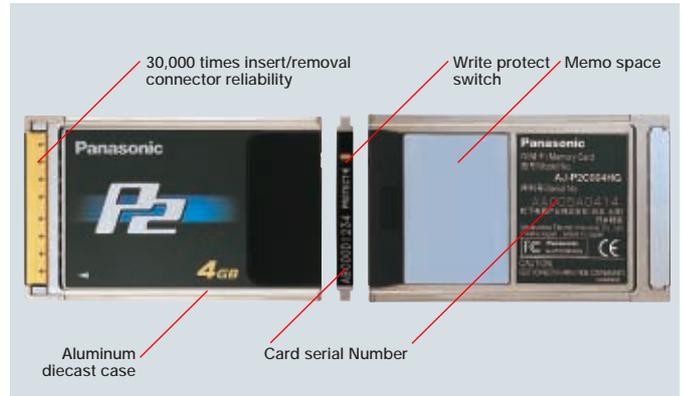

Reliable in the Face of Shock and Temperature Change

The super-slim P2 card slips easily into a shirt pocket and weighs only about 45 grams. Yet it's anything but fragile. These rugged cards provide the superb reliability only a memory card can provide and are suitable for news gathering in even the harshest environments. Despite their compact size, P2 cards withstand shock up to 1,500 G and vibration up to 15 G, operate in temperatures from -20 to 60°C, and can be stored in temperatures from -40 to 80°C.


In durability too, the P2 card goes well beyond ordinary PC cards. Its connector, portion, for example, is specially designed for professional use and has passed insertion/removal tests of more than 30,000 cycles. A card can be rewritten more than 100,000 times, for reliable, repeated use. Cards are also equipped with a write-protect switch that prevents accidental erasure.

SD/HD Migration with the DVCPRO Family

P2 cards can record in DVCPRO 50, DVCPRO and DV. And they can be used with current equipment of those formats, so you can transition easily from tape to solid-state cards. The H-Series P2 cards also support DVCPRO HD recording with the new AG-HVX200 HD P2 handheld camera-recorder. A new 8GB card has also been added to the P2 line-up.

P2 offers the seamless SD/HD migration path that distinguishes the DVCPRO family, and it supports the IT-based news gathering concept that promises to revolutionize the industry.

P2 card Roadmap

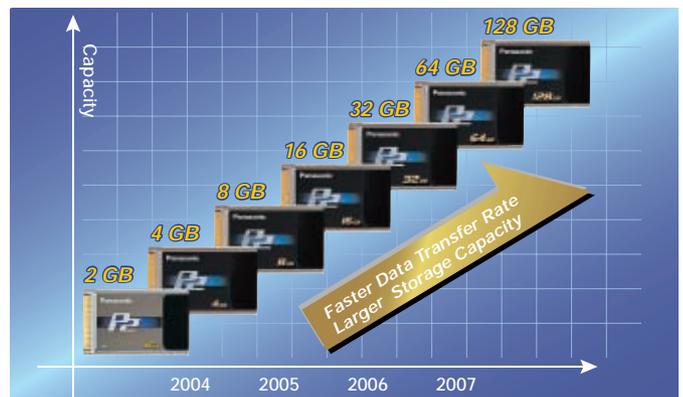

P2 cam

*Cost-efficient P2 Cam with Outstanding
Mobility and Low Power Consumption*



AJ-SPC700

MEMORY CARD CAMERA-RECORDER (P2 cam)

The AJ-SPC700 makes it even easier to start using P2. Its excellent cost performance brings the many benefits of P2 home in a form that will lower your total operating costs.

P2 Card Offers Outstanding Mobility and Reliability

The solid-state P2 card records and plays back without requiring a mechanism like that found in conventional tape or disc systems. This gives the P2 cam exceptional impact and vibration resistance, and makes it the ideal choice for reliable recording in harsh conditions.

Low Power Consumption (20 W)

Because the P2 cam does not have a drive mechanism, and thanks to use of a newly developed digital signal processor, power consumption is only 20 W* during recording. This also helps boost mobility and reliability.

*without option, LCD monitor off.

Instant Rec Start — Another Memory Card Advantage

Thanks to the solid-state memory, recording response is much faster than with tape or disc recorders. You can begin recording an instant after powering up, making it possible to capture unexpected events that other systems miss. You won't worry about missing the shot.

Next-Generation Recording Functions

The AJ-SPC700 has slots for five P2 cards and lets you record continuously onto all five in sequence. It also provides several entirely new recording functions that are possible only with memory cards.

- **Data protection:** The P2 card records only onto blank spaces, so there's no danger of accidentally writing over data.*
- **Hot-swap recording:** You can replace a full memory card with a blank one while the P2 cam is recording onto a second card. Successively swapping cards this way gives you virtually unlimited recording capability.
- **Loop recording:** By loop recording onto a specified recording area, you can continue to record over a fixed area.
- **Pre-rec:** While in standby mode, you can continuously store, and subsequently record, up to 15 seconds of video and audio (in DVCPRO). In effect, this lets you record footage of events that occur even before you press the rec start button, giving you a way to "go back" and capture moments you otherwise would have missed.

*It is possible, however, to delete data, or to lose data by re-formatting the card.

2/3" IT 3CCD Imaging System for Wide-Screen Images

Use of the reliable, cost-effective 2/3" IT 3CCD imaging system gives the AJ-SPC700 full broadcast-level performance, with low smear, 750-line resolution, and an S/N ratio of 61 dB. The AJ-SPC700 switches easily from 4:3 to 16:9 for wide-screen recording.

Newly Developed Gamma Curve for News

The gamma functions featured in Panasonic VariCam models have earned wide acclaim. Now Panasonic has developed a new gamma curve for the P2 cam: news gamma. This new function, offered in addition to conventional video gamma, helps to preserve important image data by suppressing over-saturation in highlight areas during sudden changes in contrast.

DVCPRO 50/DVCPRO/DV Switchable

The versatile P2 cam can record in high-quality 4:2:2, 50Mbps DVCPRO50; 25Mbps DVCPRO and DV. A single 4GB* P2 card holds up to 16 minutes of DVCPRO/DV data or 8 minutes of DVCPRO 50 data. Using the P2 cam's five slots and hot-swapping function, you get virtually unlimited continuous recording.

*Total card capacity includes space for data management such as system data, therefore, actual usable area is less than the capacity indicated on the card.

Clip Thumbnail Function

- **Thumbnails:** The P2 cam automatically generates a thumbnail image for each clip. These can be used for nonlinear editing or by the P2 cam itself.
- **Displaying thumbnails on the colour LCD monitor:** You can view up to 12 thumbnails at once on the 3.5" colour LCD monitor on the P2 cam's side. Any of the corresponding clips can be accessed instantly.
- **Seamless playback of selected clips:** Using the thumbnails, you can specify a number of clips for seamless playback or on-air broadcasting.

*Seamless playback is not possible between clips recorded in different formats.

Voice Memo and Shot Marker

If desired, to each clip you can add a simple OK/NG shot marker and/or a voice memo with an audio comment linked to the time code. You can do this either during or after recording to support post-recording processing.






Option Slot

Proxy Data Recording*

Mount an AJ-YAX800G Proxy Encode Card into the option card slot or 5th slot of the P2 card slots, and the AJ-SPC700 records MPEG4 proxy (low-resolution) data — useful for news flash or other studio news system use — onto the card along with the full-resolution data. You can select either of 1.5Mbps quality, 768kbps quality, or 192kbps quality. Proxy data can also be recorded onto an SD Memory Card mounted in the slot provided, for easy viewing on a laptop PC. The encode card, available as an option, lets you upgrade as future image encode systems evolve.

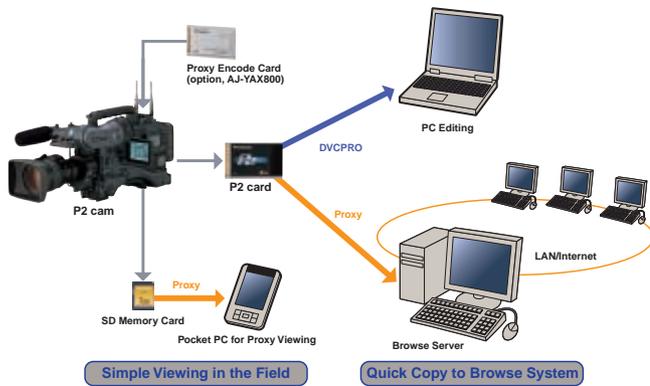

Simple Viewing in the Field


Quick Copy to Browse System

*Proxy data is AV data with low-resolution MPEG4 video and audio containing time code, metadata, and other control information.

*Use of DCF Technologies under license from Multi-Format, Inc.

Four User Scene Files

Store specific camera settings in built-in memory, then retrieve them when needed for quick, easy setup. Four files with settings can be stored in the camera's memory. Files can also be copied onto an SD Memory Card, allowing storage of up to eight files.

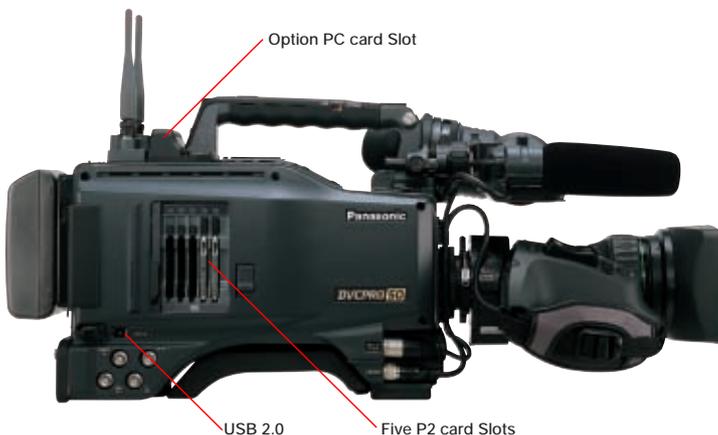

Option PC card Slot

USB 2.0

Five P2 card Slots



AJ-SPC700 Rear Connector Panel

Customized User Buttons and Menu

Three user buttons are provided. Assign a function to each, and then you can select those functions with pushbutton ease. You can also customize the on-screen menu with the items you use most often, then display them by simply pressing a button.

Auto Tracking White Balance

White balance is automatically adjusted, in real time, as the lighting changes. This makes it easy to get natural colour even when shooting scenes under difficult lighting conditions.

Connects to a PC via USB2.0 or IEEE 1394

The AJ-SPC700 comes equipped with a USB2.0 interface, and you can add an IEEE 1394 interface by mounting the optional AJ-YAD800G board. When the P2 cam is connected to a PC, you can use its card slot as an external device for the PC — ideal for nonlinear editing in the field or transmitting data.



USB Connection with P2 cam and NLE

Enhanced Functions and Specifications

- The electronic shutter has speeds of 1/60, 1/120, 1/250, 1/500, 1/1000, and 1/2000 sec, plus synchro-scan capability(1/50.4 to 1/248 sec)
- 4-position optical filter
- Select from a variety of finder markers, or make your own.
- A zebra pattern can be displayed for contrast adjustment, Auto White Balance setting, and onto colour bar output.
- One touch of the mode check button displays the camera settings for easy confirmation.
- Built-in SMPTE/EBU time code generator/reader, with time code In/Out terminal

Options That Add Versatility

- Slot for UniSlot* wireless audio receiver

*UniSlot is a trademark of Ikegami Tsusinki Co., Ltd.

- AJ-EC3 Extension Control Unit (ECU)
- AJ-VF20WBE (2.0" wide) or AJ-VF15BE (1.5") viewfinder with rugged mount design

P2 cam

*Full-Featured P2 Cam with High Sensitivity,
Digital Super Gain and 25p Shooting*



AJ-SPX900/AJ-SPX800
MEMORY CARD CAMERA-RECORDER (P2 cam)

Two Models -- Two Optical Filters to Choose From

These two models let you select either a one-wheel or two-wheel optical filter configuration to meet your needs.

The two-wheel AJ-SPX900 gives you separate ND (CLEAR, 1/4 ND, 1/16 ND, 1/64 ND) and CC (Cross, 3200K, 4300K, 6300K) filters for detailed image control.

The AJ-SPX800 features a simple, four-position (3200K, 5600K+1/8ND, 5600K, 5600K+1/64ND) one-wheel ND/CC combination filter for quick, on-location adjustment.



AJ-SPX900 optical filter



AJ-SPX800 optical filter

Progressive CCD for High Sensitivity and High Image Quality

The AJ-SPX900/SPX800 feature a 2/3" 600,000-pixel 3CCD imaging system, plus progressive scanning capability and an F13 lens with high sensitivity. You can shoot in light as low as 0.01 lux* with minimal smear. With 750 lines of resolution and a 63-dB S/N, the AJ-SPX900/SPX800 meet virtually any recording need. And it's versatile, with menu-selectable 16:9 and 4:3 aspect ratios.

*At maximum gain (using digital super gain 5P mode plus 20 dB with the +48-dB gain setting).

25p Progressive Cine-Like Shooting

The frame rate can be switched between the normal 50i (50 fields/sec), and 25p (25 frames/sec)*. In 25p mode, a complete progressive scan image is produced for each frame. The cine-like gamma curve produces a tone similar to movie film, making the AJ-SPX900/SPX800 ideal for producing documentaries, commercials, and music video clips or up-converting for HD.

*Each records onto a card in the standard 50i TV format.

Digital Super Gain (Cumulative Mode)

The AJ-SPX900/SPX800 have a digital super gain function (in cumulative mode) that allows extra gain of +12 dB (at 12 fps) and +20 dB (at 5 fps). Unlike conventional gain adjustment, digital super gain is virtually noise-free*, so picture quality remains outstanding.

With high gain and digital super gain, the AJ-SPX900/SPX800 allow ultra-high-sensitive shooting at up to +68 dB.

*At maximum gain (+68 dB) there may be a slight amount of noise.

2x Digital Zoom

You can digitally enlarge the viewfinder image to twice the normal lens magnification, producing images four times the normal size. Progressive images retain their superior resolution even with zooming, and — unlike when a lens extender is used — brightness is not reduced. Ideal as both a shooting technique and focusing support.

4-Channel Digital Audio (DVCPRO, DVCPRO 50 and DV)

Record four channels of 48-kHz/16-bit digital audio in DVCPRO, DVCPRO 50 or DV. Each channel can be set to record from a mic, line, wireless receiver or other source.

AJ-SPX900



P2 Card Recording and a Multi-Card Slot

Recording on memory cards gives you high reliability and instant response. The P2 cam's five slots allow continuous recording.

- Data protection: You cannot overwrite data unless you delete the file or re-format the card.
- Hot-swap recording: You can insert a new memory card while recording.
- Loop recording: You can loop-record over a fixed area.
- Pre-rec: You can "go back" and record up to 15 seconds (for DVCPRO) that you otherwise would have missed.

Clip Thumbnail Function

- Thumbnails: The P2 cam automatically generates a thumbnail image for each clip. These can be used for nonlinear editing or by the P2 cam itself.
- Displaying thumbnails on the colour LCD monitor: You can view up to 12 thumbnails at once on the 3.5" colour LCD monitor on the P2 cam's side. Any of the corresponding clips can be accessed instantly.
- Seamless playback of selected clips: Using the thumbnails, you can specify a number of clips for seamless playback or on-air broadcasting.

*Seamless playback is not possible between clips recorded in different formats.

Proxy Data Recording*

Mount an AJ-YAX800G Proxy Encode Card, and the AJ-SPX900 and AJ-SPX800 record MPEG4 proxy (low-resolution) data — useful for news flash or other studio news system use — onto the card along with the full-resolution data. The three levels of proxy video are available: 1.5Mbps, 768kbps or 192kbps. Proxy data can also be

recorded onto an SD Memory Card mounted in the slot provided, for easy viewing on a laptop PC. The encode card, available as an option, lets you upgrade as future image encode systems evolve.

*Proxy data is AV data with low-resolution MPEG4 video and audio containing time code, metadata, and other control information.

*Use of DCF Technologies under license from Multi-Format, Inc.

Optional IEEE 1394 Interface

Mounting an optional AJ-YAD800G board gives you an IEEE 1394 digital interface, which lets you use the P2 cam card slot as an external PC device.

Supports GPS, SDI Output

- The AJ-GPS900G GPS unit lets the AJ-SPX900/SPX800 record real-time position data onto a memory card. Conforms to UMID standards.
- Adding an optional AJ-YA902AG SDI output board enables ITU-R BT.656-4 serial digital output with 4-channel embedded audio.

Shooting Assist Functions

- The news gamma curve suppresses over-saturation in highlight areas
- Three user assignable buttons
- User menu function lets you create your own menu screens
- Up to 12 scene files — 4 in the P2 cam, 8 in an SD Memory Card
- Electronic shutter has speeds of 1/60, 1/120, 1/250, 1/500, 1/1000, and 1/2000 sec, plus synchro-scan capability (1/50.4 to 1/248 sec)
- Auto tracking white balance
- Select from a variety of finder markers, or make your own
- A zebra pattern can be displayed for contrast, Auto White Balance, and onto colour bar output
- Mode check button displays camera settings

AJ-SPX800



Options that Add Versatility

- Built-in SMPTE/EBU time code generator/reader with time code In/Out terminal
- Slot for UniSlot* wireless audio receiver
*UniSlot is a trademark of Ikegami Tsusinki Co., Ltd.
- AJ-EC3 Extension Control Unit (ECU)
- AJ-VF20WB (2.0" wide) or AJ-VF15B (1.5") viewfinder with rugged mount design



AJ-SPX800 Rear Connector Panel

Camera-Recorder Comparison	AJ-SPX900	AJ-SPX800	AJ-SPC700 (tentative)
Recording Format	DVCPRO50/DVCPRO/DV	DVCPRO50/DVCPRO/DV	DVCPRO50/DVCPRO/DV
Power Consumption	24 W *1	24 W *1	20 W *1
CCD	2/3" x3CCD, 16x9	2/3" x3CCD, 16x9	2/3" x3CCD, 16x9
Sensitivity	F13	F13	F11
S/N	63dB	63dB	61dB
Shooting Mode	50i/25p	50i/25p	50i
Optical Filters	2-wheel, ND 4-position, CC 4-position	1-wheel, 4-position (ND+CC)	1-wheel, 4-position (ND+CC)
A/D Process	14 bit	14 bit	14 bit
Colour Correction	12-axis matrix	12-axis matrix	12-axis matrix
Gamma	Video/News/Cine-like	Video/News/Cine-like	Video/News
Digital Super Gain	√	√	—
X2 Digital Zoom	√	√	—
P2 card Slot	5 Slots	5 Slots	5 Slots
Option Slot	1 Slot	1 Slot	1 Slot
Proxy Video (option)	√	√	√
Shot Marker	√	√	√
Voice Memo	√	√	√
Pre Recording	√	√	√
Loop Recording	√	√	√
Interval Recording	√	√	—
One-Shot Recording	√	√	—
UMID Data Recording	√	√	√
GPS Function (option)	√	√	—
Colour LCD Monitor	√	√	√
Clip Thumbnail	√	√	√
Digital Audio	4CH	4CH	2CH *2
Stereo Mic	√	√	—
Slot-in Wireless Mic	√	√	√
Analogue Composite Output	√	√	√
Analogue Composite Input Recording	√	√	√
Audio Output	2CH (XLR-5P)	2CH (XLR-5P)	1CH (XLR-3P)
SDI Output (option)	√	√	—
IEEE 1394 Input and Output (option)	√	√	√
Monitor Output	√	√	√
Genlock Input	√	√	√
TC Input and Output	√	√	√
USB2.0	√	√	√
ECU	√	√	√
DC Input	√	√	√
DC Output	√	√	√

Specifications are subject to change without notice. *1: without option, LCD monitor off. *2: Same audio recorded on CH1 and CH2 will be recorded on to CH3 and CH4.

P2 deck

Ideal for use in Existing Mobile Van and Studio Environments and Allows VTR-Like Nonlinear Editing



AJ-SPD850
MEMORY CARD RECORDER (P2 deck)

(with optional DVD-RAM/R drive AJ-DVD850G)

Five P2 card Slots

With its five PC card slots, the AJ-SPD850 lets you mount five P2 cards and play a continuous, extended clip recorded in sequence onto multiple cards. Using line input, you can also record a continuous, extended clip onto five P2 cards in sequence.

DVCPRO50/DVCPRO/DV Switchable

The AJ-SPD850 records in 25Mbps DVCPRO; high-quality, 4:2:2, 50Mbps DVCPRO50; and DV. A single 4GB* P2 card holds up to 16 minutes of DVCPRO/DV data or 8 minutes of DVCPRO50 data. Using all five slots, you get about 80 minutes of continuous record or play in DVCPRO/DV, or 40 minutes in DVCPRO50 — enough for on-air broadcasting or line recording.

*Total card capacity includes space for data management such as system data, therefore, actual usable area is less than capacity indicated on the card.

Four-Channel Digital Audio in All Formats

In all formats - DVCPRO50, DVCPRO, and DV — the AJ-SPD850 can record full 48-kHz/16-bit digital audio on each of the four channels. Each channel also offers both analog and digital (AES/EBU) input and output, making the AJ-SPD850 ideal for multilingual production and broadcasting.

VTR-Like Operation, Including Jog & Shuttle

The AJ-SPD850 gives you many of the same familiar buttons and jog & shuttle dial as our DVCPRO VTRs. VAR mode provides noiseless slow and fast playback at speeds from -1x (reverse) to 1x normal speed. Shuttle search moves at 100x normal speed in both forward and reverse. The output video signal can be adjusted by encoder remote, providing familiar control and operation to anyone used to broadcast VTRs.

Color LCD Monitor – Lets You View Thumbnails

A 3.5" Color LCD Monitor on the front panel lets you monitor recording and playback and view thumbnails. Using the thumbnails and jog dial, you can select clips for instant access and playback.

SD Memory card Slot


The AJ-SPD850 can read from and write to an SD Memory card mounted in the slot provided. You can use an SD Memory card for purposes such as backing up the playlist data.

Voice Memo Playback

Use this function to play back voice memos added to clips recorded with a P2 cam, such as comments from the news gathering crew. The thumbnail display shows whether there are any voice memos or shot markers.

New Playlist Function Allows VTR-Like Nonlinear Editing

The P2 memory card makes the attractive new playlist function possible. You can register up to 100 events, using In and Out points, and play them in any order you like. Thanks to the memory card's unique high-speed random access, you get seamless, continuous, on-the-spot playback with no time lags or other disruptions between cuts. This feature makes it possible to perform simple nonlinear editing, like with a VTR, using just the P2 deck (i.e., with no PC). Use the edited results just as they are in on-air broadcasts, and you have a quick, easy solution for news flash reporting and similar needs. If you add an optional DVD-RAM/R drive, you can copy your P2 data or save the playlist on the drive.

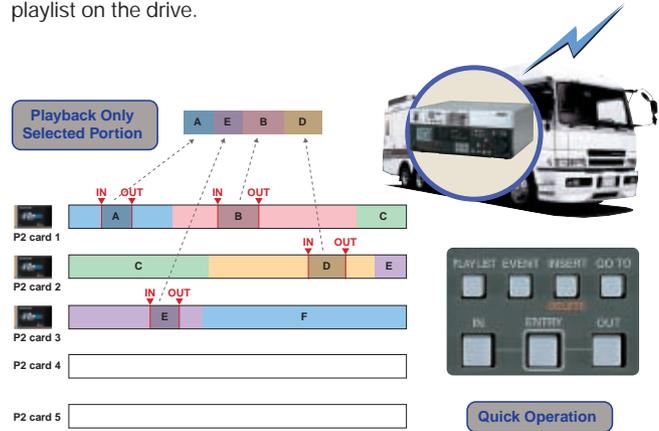


*Audio split editing and transition settings are not supported. Also, note that the AJ-SPD850 is not equipped with a function for producing DVD videos.



RS-422A and Other Familiar Interfaces

The AJ-SPD850 comes equipped with many of the same interfaces found on DVCPRO VTRs — RS-422A, component/composite video, analog audio/digital audio, REF video and more. Combine the AJ-SPD850 with an editing controller, and you can use it as the player in a linear editing system.

These interfaces also let you evolve step-by-step from tape to card. For example, you can use a P2 cam for recording while using your existing equipment for production and broadcasting.

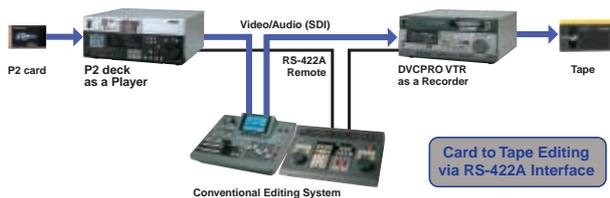

Optional DVD-RAM/DVD-R Drive


An optional AJ-DVD850G DVD-RAM/DVD-R drive can be built into the AJ-SPD850, making it easy to back up an entire P2 card or a batch of selected clips.

*Software upgrade is needed.



Equipped with PC Interfaces

- **USB 2.0:** Lets you use one of the P2 deck card slots as an external drive for your PC
- **RS-232C:** Allows remote control from a PC
- **Ethernet:** Will let you connect to a network to send data

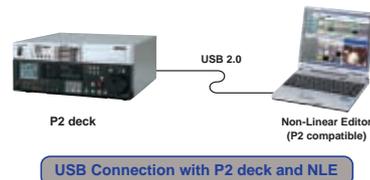

Optional SDI/IEEE 1394 Compatibility

You can expand your possibilities by adding optional serial digital (SDI) input/output and IEEE 1394 interfaces.

4U Rack Size

The AJ-SPD850 has the same height and 4U size as our DVCPRO VTRs and mounts easily into a 19-inch rack. It can slip right in as a replacement for an older VTR.

* Mounting adaptor must be purchased separately



P2 drive

Direct Connection to a PC



AJ-PCD10
MEMORY CARD DRIVE (P2 drive)

P2 store

Portable Hard Disk Unit that Copies P2 Card Data at High Speeds



AJ-PCS060G
PORTABLE HARD DISK UNIT (P2 store)

Use the AJ-PCD10 Externally or Install It into Your PC

Install the AJ-PCD10 into a 5-inch bay on a desktop PC* and use it as an internal drive in a PC. Or, with the AC adaptor and USB cable, you can use it as a stand-alone external drive. You can also use the AJ-PCD10 as an external drive with a laptop PC that's not equipped with a 5-inch bay.

*A P2 card driver (bundled with the P2 cam, deck and drive) must be installed in the PC. The P2 card driver operates under Windows XP and Windows 2000.




Five P2 card Slots

The AJ-PCD10's five PC card slots let you mount up to five P2 cards at the same time. This is especially convenient for editing a continuous clip recorded by a P2 cam in sequence onto multiple cards.

High-Speed Data Transfer via USB 2.0

The USB 2.0 interface lets you transfer data at high speeds. You can edit directly onto P2 card with nonlinear editing software. You also get blazing fast results when uploading files to a server or copying onto a hard drive.

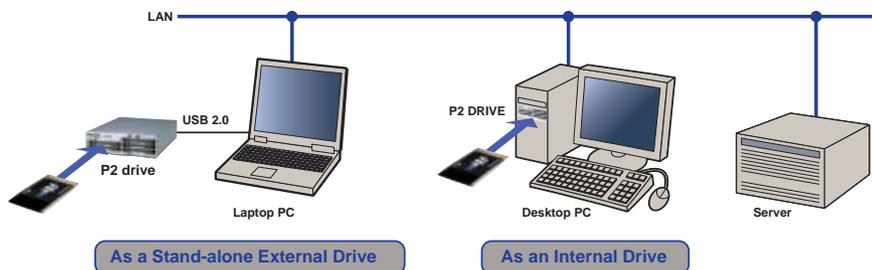

High-Speed Copying from 15 P2 Cards (4GB)

A portable hard disk unit with a P2 card slot, P2 store quickly and easily copies data from P2 cards, speeding up data acquisition and lowering costs. P2 store can copy 4GB of data in only about four minutes. P2 store also re-formats the cards so you can use them again right away. P2 store can copy up to 15 P2 cards on its 60GB capacity hard disk drive.

Compact and Lightweight, Runs on Batteries or AC Adaptor

Small in size and weighing only about 600 g, P2 store offers outstanding portability. It runs on DC power, so you can use batteries or an AC adaptor.

Withstands Impact and Vibration

A special impact-absorbing material helps cushion the hard disk and a shock-resistant magnesium alloy is used for the main body parts. This gives the rugged P2 store excellent resistance to impact and vibration, lowering the risk of data loss or damage.

*No guarantee against data damage or loss is implied.

USB2.0 Connection Allows Use as External Drive

USB2.0 connection makes it easy to link to a PC and use the data on P2 store. The PC will recognize up to 15 data volumes. To help safeguard data, the volumes are read-only and cannot be accidentally overwritten.



P2 handheld



AG-HVX200

DVCPRO HD MEMORY CARD CAMERA-RECORDER (TENTATIVE SPECIFICATIONS)

Heralding a New Era in News Gathering and Production

The new AG-HVX200 represents a milestone in the evolution of the P2 system. It's the world's first camera-recorder to feature an HD/SD multi-format platform for P2. Offering greater speed, mobility, and cost-performance than current camera-recorders, the AG-HVX200 promises to revolutionize news gathering and program production. The AG-HVX200 goes beyond the limits of conventional camera-recorders, providing a high-end solution to everything from news gathering to movie production.

- World's first 720p/1080i/576i multi-video format camera-recorder
- DVCPRO HD/DVCPRO 50/DVCPRO/DV multi-codec
- 25p shooting
- Equipped with two P2 card slots - world's first handheld camera-recorder with solid-state memory recording
- Hot swapping and pre-rec functions
- LCD monitor displays images from clip thumbnails
- World's first variable frame rate handheld camera-recorder; allows slow-motion and fast-motion recording
- News gamma and cine-like gamma curves
- Leica Dicomar wide-angle lens with cam-driven manual zoom
- Records up to four channels of non-compressed digital audio
- IEEE 1394 and USB2.0 PC interfaces
- Professional-use inputs/outputs, including XLR audio input (x2) and HD analog component output (D4)

P2 viewer

Bin Area

This area uses icons to display clips in a list. A mark is displayed over the icon of each clip containing a shot marker, voice memo, proxy data, or 16:9 image. The split window design makes it easy to copy clips.

View Area

This area is used to watch previews or story outlines of clips selected in the bin area. Double-clicking on a clip displays a timeline.



Property Area (metadata)

This area provides text information on selected clips. Information can include the clip name, video codec, frame rate, audio sampling rate, TC, duration, photographer, recording date, location, equipment used, program name, scene number, take number and more. Properties can be partially edited in the window.

Memo Area

When a clip's timeline is displayed in the view area, any voice memos and text memos recorded on the clip are displayed here in a list.

P2 Viewer 2.0

P2 APPLICATION SOFTWARE (A FREE DOWNLOAD FOR P2 USERS)

Easy Viewing and Copying of P2 Files

Available as a free download, P2 Viewer lets you use a Windows PC* to view and manipulate clips recorded onto P2 cards. P2 Viewer's sophisticated graphical user interface makes it easy to access and use all P2 file functions.

To download P2 Viewer: <http://panasonic.biz/sav/p2/>

*System requirements: Microsoft(R) Windows 2000 SP4 or later, Windows XP Professional SP1 or later, or DirectX 9.0b or later; full-color (32-bit) display; sound card; and P2 driver (comes bundled with the P2 cam, P2 deck, and P2 drive)

*An MPEG4 decoder must be separately downloaded for proxy files.

Main Features

- Plays P2 clips (DVCPRO 50, DVCPRO, DV)
- Plays proxy files
- Displays a mark over icons of clips containing shot markers, voice memos, 16:9 wide images, and proxy data
- Displays metadata-based clip filtering
- Displays clip properties, allows partial editing of properties
- Uploads metadata to a P2 cam using an SD Memory Card
- Records, plays, moves and deletes voice memos
- Writes, displays, moves and deletes text memos
- Copies clips to another P2 card or to a hard drive
- Reformats P2 cards

The P2 Partners

Panasonic has long followed an "open mind" policy that ensures easy use with products made by other manufacturers via interfaces such as IEEE 1394. This gives users the enormous benefit of purchasing new equipment that's compatible with their current hardware and software just with minimum additional investment .

We've followed the same policy with the P2 card. Throughout its development, Panasonic has provided advanced information to other manufacturers to enable them to develop products that use the P2 card.

We call this collaboration the P2 Partners. Thanks to the P2 Partners, you'll be able to choose a wider variety of P2-compatible products from a number of manufacturers.



Products Supporting P2

- Final Cut Pro

www.apple.com

Avid



Products Supporting P2

- NewsCutter® XP
- NewsCutter® Adrenaline™ FX
- Media Composer® Adrenaline™

www.avid.com

canopus



Products Supporting P2

- EDIUS HD
- EDIUS SD
- EDIUS SP
- EDIUS NX

www.canopus.com



Production Automation Archiving Networking



Products Supporting P2

- D³-Edit
- DP-Edit

www.dayang.com.cn/



A THOMSON BRAND



Products Supporting P2

- NewsEdit LT
- NewsEdit SC
- NewsEdit XT

www.thomsongrassvalley.com



Products Supporting P2

- Liquid Broadcast
- Liquid Chrome HD
- Liquid Blue

www.pinnaclesys.com/broadcast



Products Supporting P2

- CleanEdit

www.evs.tv/



Quantel



Products Supporting P2

- Nexio NewsFlash
- Nexio NewsFash FX

www2.leitch.com/



Products Supporting P2

- sQ Edit Plus

www.quantel.com



Products Supporting P2

- DV Conversion Suite

www.focusinfo.com



Products Supporting P2

- FlipFactory
- MAP
- Launch

www.telestream.net



P2 Optional Accessories

P2 cam (AJ-SPC700/AJ-SPX800/AJ-SPX900) OPTIONS



AJ-VF20WB
2" EVF 16:9/4:3 SWITCHABLE



AJ-VF15B
1.5" EVF FOR 4:3



FUJINON 2/3" LENS



CANON 2/3" LENS



AJ-MC700
MICROPHONE KIT



AJ-MH800G
MICROPHONE HOLDER



AJ-YAX800G
VIDEO ENCODER CARD
*Camera-Recorder software upgrade is required.



SD MEMORY CARD



AJ-YAD800G
IEEE 1394 INTERFACE BOARD



SHAN-TM700
TRIPOD ADAPTR



AJ-EC3
EXTENSION CONTROL UNIT



AJ-B75
AC ADAPTOR



ANTONBAUER BATTERY PACK



ANTONBAUER AC
ADAPTOR/BATTERY CHARGER



ULTRA LIGHT
ANTONBAUER ULTRA LIGHT




AJ-SC900
SOFT CARRYING CASE
*Not available in some area



AJ-HT901G
HARD CARRYING CASE
*Not available in some area



SHAN-RC700
RAIN COVER
*Not available in some area

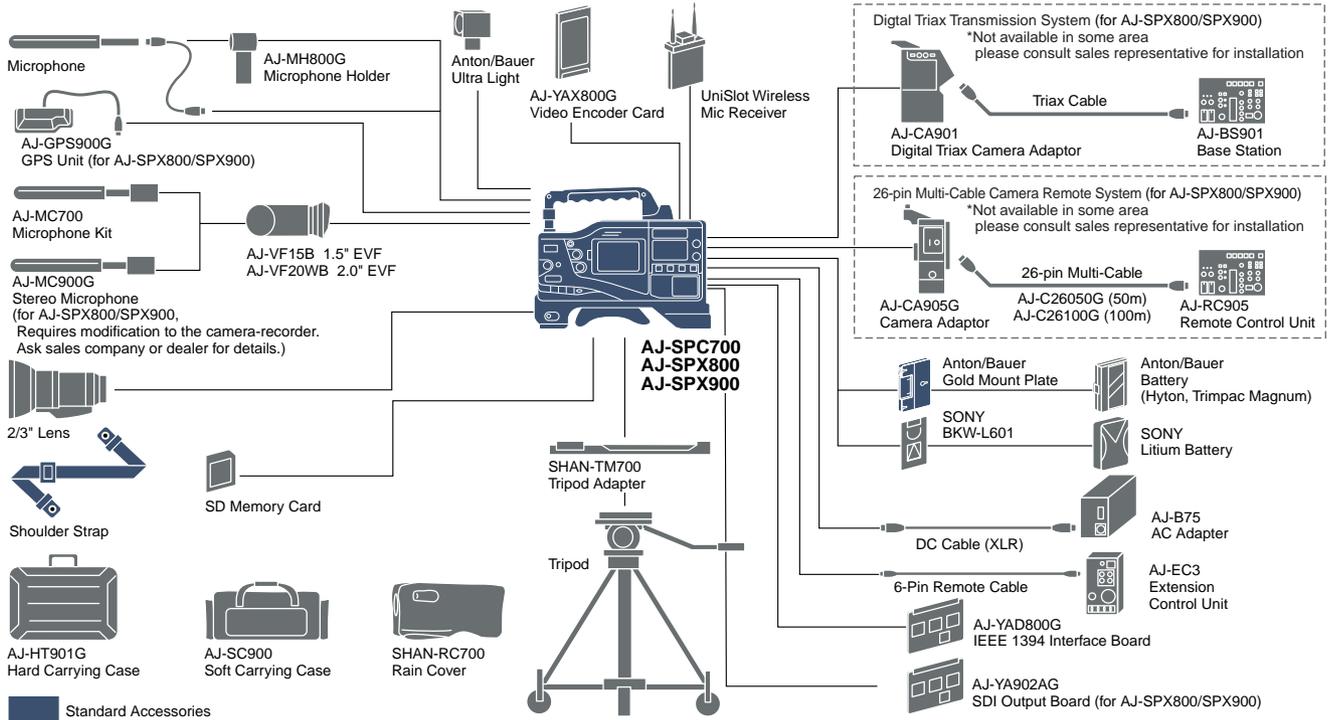

P2 cam (FOR AJ-SPX800/AJ-SPX900) OPTIONS



AJ-MC900G*
STEREO MICROPHONE
* Requires modification to the camera-recorder mic terminal. Ask your local sales company or dealer for details. (for AJ-SPX800/SPX900)



AJ-GPS900G
GPS UNIT
(for AJ-SPX800/SPX900)



AJ-YA902AG
SDI OUTPUT BOARD
(for AJ-SPX800/SPX900)

DIGITAL TRIAX TRANSMISSION SYSTEM
AJ-BS901
DIGITAL TRIAX BASE STATION
AJ-CA901
DIGITAL TRIAX CAMERA ADAPTOR

26-PIN MULTI-CABLE CAMERA REMOTE SYSTEM
AJ-CA905G
CAMERA ADAPTOR
AJ-RC905
REMOTE CONTROL UNIT

P2 deck (AJ-SPD850) OPTIONS



AJ-DVD850G
DVD-RAM/DVD-R DRIVE



AJ-YA755G
SDI BOARD



AJ-YAD850G
IEEE 1394 INTERFACE BOARD



AJ-MA75P
RACK MOUNT ADAPTER
*slide rail, not included

HD/SD LCD MONITORS



BT-LH900
8.4" LCD HD/SD MONITOR



BT-LH1500
15" LCD HD/SD MONITOR



BT-LH1800
18" LCD HD/SD MONITOR

P2 Specifications

AJ-P2C008H/AJ-P2C004H/AJ-P2C002S MEMORY CARD (P2 card)

Common Specification

Interface:	CardBus (PC Card standards)
Power Source:	DC3.3V ±0.3V
Power Consumption:	Approx. 1.5W
Operating Temperature:	-20°C to 60°C
Operating Humidity:	5% to 90% (no condensation)
Storage Temperature:	-40°C to 80°C
Storage Humidity:	5% to 90% (no condensation)
Weight:	45 g
Dimensions (W x H x D):	54 x 5 x 85.6 mm

AJ-P2C008H Specifications

Recording Capacity:*1	Approx. 8GB	
Reading/Writing Speed:*2	640 Mbps	
Recording Playback Time*3:	DVCPROHD:	Approx. 8 min. (Video/4CH audio)
	DVCPRO50:	Approx. 16 min. (Video/4CH audio)
	DVCPRO/DV:	Approx. 32 min. (Video/2CH audio)

AJ-P2C004H Specifications

Recording Capacity:*1	Approx. 4GB	
Reading/Writing Speed:*2	640 Mbps	
Recording Playback Time*3:	DVCPROHD:	Approx. 4 min. (Video/4CH audio)
	DVCPRO50:	Approx. 8 min. (Video/4CH audio)
	DVCPRO/DV:	Approx. 16 min. (Video/2CH audio)

AJ-P2C002S Specifications

Recording Capacity:*1	Approx. 2GB	
Reading/Writing Speed:*2	320 Mbps	
Recording Playback Time:	DVCPRO50:	Approx. 4 min. (Video/4CH audio)
	DVCPRO/DV:	Approx. 8 min. (Video/2CH audio)

*1 Total card capacity includes space for data management such as system data, therefore, actual usable area is less than capacity indicated on the card.

*2 This data transfer speed is theoretical value. An actual data transfer speed varies according to operating condition and devices.

*AJ-P2C008H will be available soon.

AJ-SPC700

MEMORY CARD CAMERA-RECORDER (P2 cam)

[TENTATIVE]

General Specification

Power Source:	DC 12V (11.0V to 17.0V)
Power Consumption:	20W (without option, LCD monitor off)
Operating Temperature :	0°C to 40°C
Storage Temperature:	-20°C to 60°C
Operating Humidity:	10% to 85% (relative humidity)
Continuous Operation Time:	Approx. 150 min. without option, LCD monitor off and using AntonBauer Hytron50 battery
Weight:	Approx. 4.2 kg (main unit only, without VF mount)
Dimensions (W x H x D):	137 x 209 x 318 mm without handle and wireless option cover

Camera Section

Image Sensor:	2/3" IT-CCD (600,000 pixels) x 3
Optical Filters:	1: 3200K, 2: 5600K+1/8ND, 3: 5600K, 4: 5600K+1/64ND
Quantizing:	14 bit linear/18 MHz
Digital Signal Processing:	36 MHz
Horizontal Drive Frequency:	18 MHz
Programmable Gain:	-3/0/+3/+6/+9/+12/+15/+18/+21/+24/+27/+30 dB selectable 3-position (L/M/H)
Super Gain:	+30/+36 dB selectable
Shutter Speed:	1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000 sec
Syncro Scan Shutter:	1/50.4 to 1/248.0 sec
Lens Mount:	2/3" bayonet type
Optical System:	F 1.4 prism system
Sensitivity:	F11.0 at 2000 lux, 89.9% reflect
Minimum Illumination:	0.5 Lux at F1.4, +36dB gain
Video S/N:	better than 61dB (standard)
Horizontal Resolution:	750 TV lines at center, standard
Vertical Resolution:	450/500 lines (super V)
Registration:	Less than 0.05% (whole zone, without lens distortion)
LCD Monitor:	3.5" 200,000-pixels LCD colour monitor

Memory Card Recorder Section

Video Recording Format:	DVCPRO50/DVCPRO/DV switchable		
Audio Recording Format:	48kHz/16bits PCM audio, max. of 4CH *CH1&2 same audio will be recorded on to CH3&4		
Recording Media:	P2 card		
Recording/Playback Time*:	[25 Mbps video and 2CH audio]		
[DVCPRO/DV]		by single cards	using 5 card slot
	AJ-P2C004H	Approx. 16 min.	Approx. 80 min.
	AJ-P2C002S	Approx. 8 min.	Approx. 40 min.
Recording/Playback Time*:	[50 Mbps video and 4CH audio]		
[DVCPRO50]		by single cards	using 5 card slot
	AJ-P2C004H	Approx. 8 min.	Approx. 40 min.
	AJ-P2C002S	Approx. 4 min.	Approx. 20 min.

Video Specification (when played back with standard player, component out)

PAL Bandwidth:	Y: 25 Hz to 5.75 MHz, +1.0/-3.0 dB (DVCPRO50), Pb/Pr: 25 Hz to 2.75 MHz, +1.0/-3.0 dB (DVCPRO50)
S/N Ratio:	Better than 55 dB

Audio Specification (when played back with standard player)

Sampling Frequency:	48 kHz (sync. with video)
Quantizing:	16 bits
Frequency Response:	20 Hz to 20 kHz, ±1.0dB (reference level)
Dynamic Range:	More than 85 dB (1 kHz, AWTD)
Distortion:	Within 0.1% (1 kHz, reference level)
Headroom:	18 dB

Input and Output

GENLOCK IN:	BNC, 1.0 Vp-p, 75 Ω (switchable to VIDEO IN)
VIDEO MONITOR OUT:	BNC, 1.0 Vp-p, 75 Ω
VIDEO OUT:	BNC, 1.0 Vp-p, 75 Ω
AUDIO IN:	XLR 3-pin x 2 (CH1/CH2), LINE/MIC/MIC+48V switchable, LINE: 0/+4 dBu selectable, MIC: -60/-50 dBu selectable, MIC+48V: Phantom +48 V, -60/-50 dBu selectable
MIC IN:	XLR 3-pin, balanced, 3 kΩ, -50/-40 dBu selectable, Phantom +48 V ON/OFF
WIRELESS IN:	D-sub 25-pin, -40 dBu
AUDIO OUT CH1/CH2:	XLR 3-pin, balanced, low-impedance, 0/+4 dBu selectable
PHONES OUT:	Stereo Mini Jack x 2
TC IN:	BNC, 0.5 to 8 Vp-p, 10 kΩ
TC OUT:	BNC, low-impedance, 2.0±0.5 Vp-p
DC IN:	XLR 4-pin, DC 12 V (DC 11.0 V to 17.0 V)
DC OUT:	4-pin, DC12 V (DC11.0 to 17.0 V), Max. 1A
LENS:	12-pin
EVF:	20-pin
ECU:	6-pin (for AJ-EC3)

Included Accessories

Shoulder strap, Front audio volume knob, Screw M2 x 6 mm (XYNZ+J6ZF)
--

AJ-SPX900/AJ-SPX800

MEMORY CARD CAMERA-RECORDER (P2 cam)

General Specification

Power Source:	DC 12V (11.0V to 17.0V)
Power Consumption:	24W (without option, LCD monitor off) 27W (with SDI & IEEE 1394 option, LCD monitor on)
Operating Temperature :	0°C to 40°C
Storage Temperature:	-20°C to 60°C
Operating Humidity:	10% to 85% (relative humidity)
Continuous Operation Time:	Approx. 120 min. without option, LCD monitor off and using AntonBauer Hytron50 battery
Weight:	Approx. 4.2 kg (main unit only, without VF mount)
Dimensions (W x H x D):	137 x 209 x 318 mm without handle and wireless option cover

Camera Section

Image Sensor:	2/3" IT-CCD (600,000 pixels) x 3
AJ-SPX900 Optical Filters:	ND (1: CLEAR, 2: 1/4 ND, 3: 1/16 ND, 4: 1/64 ND) CC (1: Cross, 2: 3200K, 3: 4300K, 4: 6300K)
AJ-SPX800 Optical Filters:	1: 3200K, 2: 5600K+1/8ND, 3: 5600K, 4: 5600K+1/64ND
Quantizing:	14 bit linear/18 MHz
Digital Signal Processing:	36 MHz
Horizontal Drive Frequency:	18 MHz
Programmable Gain:	-3/0/+3/+6/+9/+12/+15/+18/+21/+24/+27/+30 dB selectable 3-position (L/M/H)
Super Gain:	+30/+36/+42/+48 dB selectable
Digital Super Gain:	+6/+12/+20dB selectable
Shutter Speed:	1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000 sec
Syncro Scan Shutter:	1/50.4 to 1/248.0 sec
Lens Mount:	2/3" bayonet type
Optical System:	F 1.4 prism system
Sensitivity:	F13 at 2000 lux, 89.9% reflect
Minimum Illumination:	0.01 Lux at F1.4, +48dB and +20dB gain
Video S/N:	better than 63dB (standard)
Horizontal Resolution:	750 TV lines at center, standard
Vertical Resolution:	450/500 lines (super V)
Registration:	Less than 0.05% (whole zone, without lens distortion)
LCD Monitor:	3.5" 200,000-pixels LCD colour monitor

Memory Card Recorder Section

Video Recording Format:	DVCPRO50/DVCPRO/DV switchable
Audio Recording Format:	48kHz/16bits, 4CH (DVCPRO50), 2CH/4CH switchable (DVCPRO/DV)
Recording Media:	P2 card
Recording/Playback Time*:	[25 Mbps video and 2CH audio]
[DVCPRO/DV]	by single cards using 5 card slot
	AJ-P2C004H Approx. 16 min. Approx. 80 min.
	AJ-P2C002S Approx. 8 min. Approx. 40 min.
Recording/Playback Time*:	[50 Mbps video and 4CH audio]
[DVCPRO50]	by single cards using 5 card slot
	AJ-P2C004H Approx. 8 min. Approx. 40 min.
	AJ-P2C002S Approx. 4 min. Approx. 20 min.

Video Specification (when played back with standard player, component out)

Bandwidth:	Y: 25 Hz to 5.75 MHz, +1.0/-3.0 dB (DVCPRO50), Pb/Pr: 25 Hz to 2.75 MHz, +1.0/-3.0 dB (DVCPRO50)
S/N Ratio:	Better than 55 dB

Audio Specification (when played back with standard player)

Sampling Frequency:	48 kHz (sync. with video)
Quantizing:	16 bits
Frequency Response:	20 Hz to 20 kHz, ±1.0dB (reference level)
Dynamic Range:	More than 85 dB (1 kHz, AWTD)
Distortion:	Within 0.1% (1 kHz, reference level)
Headroom:	18 dB

Input and Output

GENLOCK IN:	BNC, 1.0 Vp-p, 75 Ω (switchable to VIDEO IN)
VIDEO MONITOR OUT:	BNC, 1.0 Vp-p, 75 Ω
VIDEO OUT:	BNC, 1.0 Vp-p, 75 Ω
AUDIO IN:	XLR 3-pin x 2 (CH1/CH2), LINE/MIC/MIC+48V switchable, LINE: 0/+4 dBu selectable, MIC: -60/-50 dBu selectable, MIC+48V: Phantom +48 V, -60/-50 dBu selectable
MIC IN:	XLR 3-pin, balanced, 3 kΩ, -50/-40 dBu selectable, Phantom +48 V ON/OFF
WIRELESS IN:	D-sub 25-pin, -40 dBu
AUDIO OUT CH1/CH2:	XLR 5-pin, balanced, low-impedance, 0/+4 dBu selectable
PHONES OUT:	Stereo Mini Jack x 2
TC IN:	BNC, 0.5 to 8 Vp-p, 10 kΩ
TC OUT:	BNC, low-impedance, 2.0±0.5 Vp-p
DC IN:	XLR 4-pin, DC 12 V (DC 11.0 V to 17.0 V)
DC OUT:	4-pin, DC12 V (DC11.0 to 17.0 V), Max. 1A
LENS:	12-pin
EVF:	20-pin
GPS:	6-pin (for AJ-GPS900G)
ECU:	6-pin (for AJ-EC3)

Included Accessories

Shoulder strap, Front audio volume knob, Screw M2 x 6 mm (XYNZ+J6FZ)
--

P2 Specifications

AJ-SPD850

MEMORY CARD RECORDER (P2 deck)

General Specification

Power Source:	AC 100 V to 240 V \pm 10%, 50/60 Hz
Power Consumption:	Max. 105 W
Operating Temperature:	5°C to 40°C
Operating Humidity:	10% to 80% (no condensation)
Weight:	15 kg
Dimensions (W x H x D):	424 x 175.2 x 430 mm
Recording Video Signal:	625i/50, 525i/60 switchable
Video Recording Format:	DVCPRO50/DVCPRO/DV switchable
Audio Recording Format:	48kHz/16bits, 4CH (DVCPRO50), 2CH/4CH switchable (DVCPRO/DV)
Recording Media:	P2 card
Recording/Playback Time*: [DVCPRO/DV]	[25 Mbps video and 2CH audio] AJ-P2C004H by single cards using 5 card slot Approx. 16 min. Approx. 80 min. AJ-P2C002S Approx. 8 min. Approx. 40 min.
Recording/Playback Time*: [DVCPRO50]	[50 Mbps video and 4CH audio] AJ-P2C004H by single cards using 5 card slot Approx. 8 min. Approx. 40 min. AJ-P2C002S Approx. 4 min. Approx. 20 min.
Digital Slow:	-1 to +1 times normal speed (DVCPRO50/DVCPRO/DV)

Video Specification (Digital Video)

Sampling Frequency:	Y: 13.5 MHz, Pb/Pr: 6.75 MHz (DVCPRO50)
Quantizing:	8 bits
Video Compression Format:	DV-Based Compression (SMPT314M)
Video Compression Ratio:	1/3.3 (DVCPRO50), 1/5 (DVCPRO)
ErrorCorrection:	Reed-Solomon product code
Video Bit Rate:	50 Mbps (DVCPRO 50), 25 Mbps (DVCPRO/DV)

• Component IN/Component OUT

Video Bandwidth (625i):	Y: 30 Hz to 5.75 MHz (-2.0 dB) Pb/Pr: 25 Hz to 2.75 MHz (-2.0 dB)
Video Bandwidth (525i):	Y: 30 Hz to 5.75 MHz (-2.0 dB) Pb/Pr: 30 Hz to 2.75 MHz (-2.0 dB)

S/N Ratio:	Better than 55 dB
K Factor:	Less than 1%
Y/C Delay:	Less than 20 nsec

• Composite IN/Composite OUT

Video Bandwidth (625i):	Y: 25 Hz to 5.5 MHz (-3.0 dB)
Video Bandwidth (525i):	Y: 30 Hz to 5.5 MHz (-3.0 dB)
Y/C Delay:	less than 20 nsec

Video Input Signal

Analogue Component Input:	BNC x 3 (Y,Pb,Pr) Y: 1.0 Vp-p, 75 Ω , Pb/Pr (625i): 0.7 Vp-p, 75 Ω (100% colour bar) Pb/Pr (525i): 0.486/0.7 Vp-p switchable, 75 Ω (75% colour bar, 7.5% setup)
Analogue Composite Input:	BNC x 2 (loop-through), 75 Ω on/off, Video: 1.0 Vp-p (75 Ω)
Reference Input:	Analogue composite, BNC x 2 (loop-through), 75 Ω on/off
SDI Input (option):	BNC x 2 (active-through), serial digital component ITU-R BT.656-4 (PAL), SMPTE259M-C (NTSC) standard

Video Output Signal

Analogue Component Output:	BNC x 3 (Y,Pb,Pr) Y: 1.0 Vp-p, 75 Ω , Pb/Pr (625i): 0.7 Vp-p, 75 Ω (100% colour bar) Pb/Pr (525i): 0.486/0.7 Vp-p switchable, 75 Ω (75% colour bar, 7.5% setup)
Analogue Composite Output:	BNC x 3, Video 1/Video 2 (Video/WFM selectable) Video 3 (superimpose on/off)
SDI Output (option):	BNC x 3, SDI1, SDI2, SDI3 (superimpose on/off) ITU-R BT.656-4 (PAL), SMPTE259M-C (NTSC) standard

Video Output Adjustment Range

Gain:	\pm 3 dB
Chroma Gain:	\pm 3 dB
Hue (Chroma Phase):	\pm 30°
Set-up Level (Black Level):	\pm 14 IRE (\pm 100 mV)
Sync Phase:	\pm 15 μ sec
SC Phase:	\pm 180°

Audio Specification (Digital Audio)

Sampling Frequency:	48 kHz (sync video)
Quantizing:	16 bits
Frequency Response:	20 Hz to 20 kHz, \pm 1.0 dB (reference level)
Dynamic Range:	More than 90 dB (1 kHz, emphasis off, "A" weighted)
Distortion:	Less than 0.05% (1 kHz, emphasis off, reference level)
Cross Talk:	Less than -80 dB (1 kHz, between 2 channels)
Wow & Flutter:	Below measurable limit
Headroom:	18 dB (PAL), 20 dB (NTSC)
De-emphasis:	T1=50 μ sec, T2=15 μ sec (on/off auto)

Audio Input Signal

Analogue Input:	XLR x 4 (CH1/CH2/CH3/CH4), 600 Ω /high-impedance switchable, +4/0/-20 dBu switchable
Digital Input:	BNC x 2 (CH1/2, CH3/4), AES/EBU format
Serial Digital Input:	BNC x 2 (active through), 75 Ω ITU-R BT.656-4 standard (PAL) SMPTE259M-C/272M-A standard (NTSC)

Audio Output Signal

Analogue Output:	XLR x 4 (CH1/CH2/CH3/CH4), low-impedance, +4/0/-20 dBu switchable
Digital Output:	BNC x 2 (CH1/2, CH3/4), AES/EBU format, 1.0 \pm 0.2 Vp-p 75 Ω
Serial Digital Output:	BNC x 3, 75 Ω ITU-R BT.656-4 standard (PAL) SMPTE259M-C/272M-A standard (NTSC)
Monitor Output:	XLR x 2, low-impedance, +4/0/-20 dBu switchable
Headphones:	Stereo mini jack, 8 Ω , variable level

Other Input and Output

Time Code Input:	XLR x 1, 0.5 to 8.0 Vp-p, 10 k Ω
Time Code Output:	XLR x 1, low-impedance, 2.0 \pm 0.5 Vp-p
RS-422A Input/Output:	D-sub 9-pin, RS-422A Interface
RS-232C:	D-sub 25-pin, RS-232C Interface
Encoder Remote:	D-sub 15-pin

AJ-PCD10

MEMORY CARD DRIVE (P2 drive)

General Specification

Power Source:	AC 100 V to 240 V (0.8 A to 0.4 A), 50/60 Hz DC 16 V (0.8 A) with AC adaptor DC 12 V (1.0 A) when PC built-in
Operating Temperature:	0°C to 40°C
Operating Humidity:	0% to 90% (no condensation)
Weight:	Approx. 1.2 kg
Dimensions (W x H x D):	148.4 x 42.5 x 199 mm excluding protruding parts

PC System Requirement

Operating System:	Proper operation guaranteed Windows XP Professional (later SP1) Windows 2000 (later SP4)
Main Memory:	512 MB or greater recommended
Interface:	USB Ver. 2.0 compliant

Card Slot

PC Card Slot:	PC Card (Type II) x 5 slot (CardBus compliant)
---------------	--

Panasonic

Matsushita Electric Industrial Co., Ltd.
Systems Business Group
 2-15 Matsuba-cho, Kadoma, Osaka 571-8503
 Japan
 Phone +81 6 6905 4650 Fax +81 6 6908 5969
<https://eww.pavc.panasonic.co.jp/pro-av/>

[Countries and Regions]

Argentina +54 1 308 1610
 Australia +61 2 9887 6222
 Austria +43 (0)1 610 80 773
 Bahrain +973 252292
 Belgium +32 (0)2 481 04 57
 Bulgaria +359 2 946 0786
 China +86 10 6515 8828
 (Hong Kong +852 2313 0888)
 Czech Republic +420 236 032 552/511
 Denmark +45 43 20 08 57
 Egypt +20 2 3938151
 Finland, Latvia, Lithuania, Estonia* +358 (9)521 52 53
 France +33 (0)1 55 93 66 00
 Germany +49 (0)611 235 401
 Greece +30 210 96 92 300
 Hungary +36 (1)382 60 60
 Indonesia +62 21 801 5666
 +62 21 385 9449
 Iran +98 21 2271463
 Italy +39 02 67 88 449
 Jordan +961 6 586 1914

Kazakhstan +7 3272 504 777
 Kuwait +965 481 2123
 Lebanon +961 1 216827
 Malaysia +60 3 5549 5422 (PSE)
 +60 3 5546 7000 (PM)
 Montenegro, Serbia* +41 (0)26 466 25 20
 Netherlands +31 73 64 02 577
 New Zealand +64 9 272 0100
 Norway +47 67 91 78 00
 Pakistan +92 5370320 21
 Philippines +63 2 633 6162
 Poland +48 (22)338 1100
 Portugal +351 21 425 77 04
 Romania +40 21 211 4855
 Russia & CIS +7 095 980 42 06
 Saudi Arabia +966 1 465 0709
 Singapore +65 6270 0110
 Slovak Republic +421 (0)2 52 92 14 23
 Slovenia, Croatia, Bosnia, Macedonia* +44 (0)20 76 63 36 57
 South Africa +27 11 313 1400

Spain +34 (93) 425 93 00
 Sweden +46 (8) 680 26 41
 Switzerland +41 (0)41 259 96 32
 Thailand +66 2 731 8888
 Turkey +90 216 578 3700
 U.A.E. +971 4 282201
 Ukraine +380 44 4903437
 [ext. 112]
 U.K. +44 (0) 1344 70 69 20

